

We Provide Brand, Quality, Services.

MAKE YOUR HOME SMART
WITH US

CATALOGUE

SURVEILLANCE SYSTEM | INTRUSION ALARM
VIDEO DOOR PHONE | SMART LOCK | NETWORKING
INTERCOM | HOME THEATER | HOME AUTOMATION


www.prajasecurity.com



EST CHOIC

PRAJA SECURITY SYSTEMS



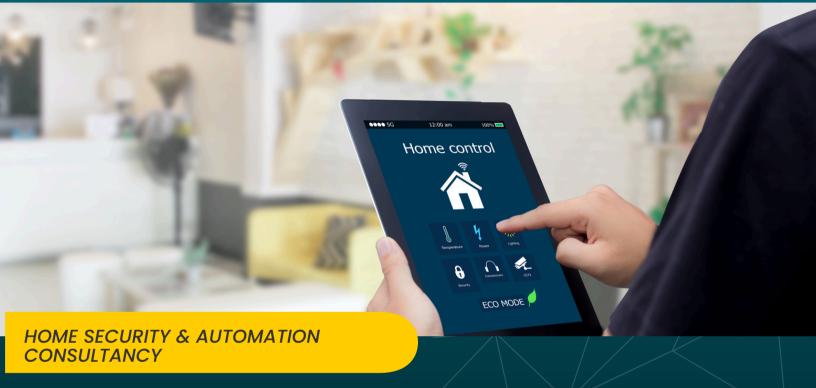

ABOUT US

In the intricate dance of safeguarding your sanctuary, Praja Security Systems orchestrates a symphony of safety unlike any other. We seamlessly weave together an array of security measures - from vigilant surveillance cameras keeping watch to vigilant intrusion alarms standing guard. But our canvas doesn't stop there. Picture this: video door phones whispering secrets, intercoms echoing assurances, and biometric locks standing steadfast against intruders.

Yet, our masterpiece extends beyond mere protection. We infuse elements of home automation, turning your abode into a harmonious haven where security meets sophistication. And what's a sanctuary without a touch of entertainment? Enter our theater systems, ready to whisk you away on cinematic adventures right from the comfort of your fortress.

At Praja Security Systems, we don't just provide security; we craft an experience. Join us in painting a picture of safety and serenity, where every brushstroke is a measure of peace of mind.

www.prajasecurity.com +91-9672452691

WHY US

Praja Security Systems offers comprehensive security solutions tailored to your needs. With years of expertise, we employ cutting-edge technology and personalized approaches to ensure maximum protection. Our commitment to reliability and trustworthiness means you can count on us 24/7. We provide affordable services without compromising on quality. Whether you need CCTV surveillance or access control systems, we've got you covered. Our team is dedicated to excellence, continuously improving to stay ahead of emerging threats. Choose Praja Security Systems for unmatched peace of mind and protection. Contact us today to safeguard what matters most to you.







Catalogue

Check Our Surveillance & Home Automation Catalog For Your Home Needs. Get The Best Security & Automation For You Now!





















SHOP NOW

+91-9672452691 www.prajasecurity.com

CP PLUS NETWORK CAMERA







Best Quality

Best Price

Discount



PREMIUM * OUALITY *

NETWORK CAMERA



CP-UNC-TA21PL3 2MP Full HD IR Network Bullet Camera - 30Mtr

- 1/2.8" 2MP PS CMOS Image Sensor (0.9071 contimetree)
- Max. 2MP (1920 × 1080) @25/30 fps
- Instastream and Smart H.264+ dual-stream encoding
- DWDR, Day/Night(ICR), 3D-DNR, ROI, AWB, AGC, BLC, HLC
- 3.6mm fixed lens (2.8mm optional)
 ID Renge of 30 Metres ID67, Ref.
- IR Range of 30 Metres, IP67, PoE
- Mobile Software: iCMOB, gCMOB
- CMS Software: KVMS Pro



CP-UNC-DA21PL3C 2MP Full HD IR Network Dome Camera - 30Mtr.

- 1/2.8" 2MP PS CMOS Image Sensor (0.9071 centimetres)
- Max. 2MP (1920 x 1080)@25/30fps
- Instastream and H.264+ dual-stream encoding
- DWDR, Day/Night (ICR), 3D-DNR, ROI, AWB, AGC, BLC, HLC
- 3.6mm fixed lens (2.8mm optional)
- IR Range of 30 Metres, IP67, PoE
- Support Built-in Mic, Mobile Software: iCMOB, gCMOB, CMS Software: KVMS Pro



CP-UNC-DA21PL3 2MP Full HD IR Network Dome Camera - 30Mtr

- 1/2.8" 2MP PS CMOS Image Sensor (0.9071 centimeters)
- 25/30fps@1080P(1920×1080)
- Instastream and Smart H.264+ dual-stream encoding
- DWDR, Day/Night(ICR), 3D-DNR, ROI, AWB, AGC, BLC, HLC
- 3.6mm fixed lens (2.8mm optional)
- IR Range of 30 Mtrs, IP67, PoE
- Mobile Software: iCMOB, gCMOB
- CMS Software: KVMS Pro



CP-UNC-DA21ZPL4-M 2MP Full HD IR Network Dome Camera - 40Mtr.

- 1/2.7" 2MP PS CMOS Image Sensor (0.9407cm)
- 25/30fps@1080P(1920×1080)
- DWDR, Day/Night(ICR), 3D-DNR, ROI, AWB, AGC, BLC, HLC
- 2.8~12mm Motorized lens
- IR Range of 40 Mtrs, IP67, Micro SD Card, PoE
- Mobile Software: iCMOB, gCMOB
- CMS Software: KVMS Pro



CP-UNC-TA21PL3C 2MP Full HD IR Network Bullet Camera - 30Mtr

- 1/2.8" 2MP PS CMOS Image Sensor (0.9071 centimetres)
- Max. 2MP (1920 × 1080)@25/30fps
- Instastream and Smart H.264+ dual-stream encoding
- DWDR, Day/Night (ICR), 3D-DNR, ROI, AWB, AGC, BLC, HLC, 3.6mm fixed lens (2.8mm optional)
- IR Range of 30 Mtrs, IP67, PoE
- Supports built-in mic
- Mobile Software: iCMOB, gCMOB
- CMS Software: KVMS Pro



CP-UNC-TA21ZPL5-M 2MP Full HD Network IR Bullet Camera - 50Mtr.

- 1/2.8" 2MP PS CMOS Image Sensor (0.9071 cm)
- 25/30fps@1080P(1920×1080)
- Instastream and H.264+ dual-stream encoding
- DWDR, Day/Night(ICR), 3D-DNR, ROI, AWB, AGC, BLC, HLC
- 2.8~12mm Motorized lens
- IR Range of 50 Mtrs, IP67, Micro SD Card, PoE
- Mobile Software: iCMOB, gCMOB
- CMS Software: KVMS Pro



NETWORK CAMERA



CP-UNC-TA41PL3 4MP Network IR Bullet Camera - 30Mtr.

- 1/3" 4MP PS CMOS Image Sensor(0.84667Cm)
- Max. Output 4MP(2560 × 1440)@25/30 fps
- Instastream and H.264 dual-stream encoding
- DWDR, Day/Night(ICR), 3D-NR, ROI, AWB, AGC, BLC, HLC
- 3.6mm lens (2.8mm optional)
- IR Range of 30 Mtrs, IP67
- Mobile Software: iCMOB, gCMOB
- CMS Software: KVMS Pro



CP-UNC-DA41PL3 4MP Network IR Dome Camera - 30Mtr.

- 1/3" 4MP PS CMOS Image Sensor(0.84667Cm)
- Max. Output 4MP(2560 × 1440)@25/30 fps
- Instastream and H.264 dual-stream encoding
- DWDR, Day/Night(ICR), 3D-NR, ROI, AWB, AGC, BLC, HLC
- 3.6mm lens (2.8mm optional)
- IR Range of 30 Mtrs, IP67
- Mobile Software: iCMOB, gCMOB
- · CMS Software: KVMS Pro



CP-UNC-TA41PL3C 4MP IR Network Bullet Camera - 30Mtr.

- 1/3" 4MP PS CMOS Image Sensor (0.84667cm)
- Outputs max. 4 MP (2560 × 1440)@25/30 fps
- Instastream/Smart H.264+ Dual-stream encoding
- DWDR, Day/Night (ICR), 3D-NR, ROI, AWB, AGC, BLC, HLC
- 3.6mm fixed lens (2.8mm Optional)
- IR Range of 30 Mtrs, IP67, PoE
- Support Built-in Mic
- Mobile Software: iCMOB, gCMOB, KVMS Pro



CP-UNC-DA41PL3C 4MP IR Network Dome Camera - 30Mtr

- 1/3" 4MP PS CMOS Image Sensor (0.84667cm)
- Outputs max. 4 MP (2560 × 1440)@25/30 fps
- Instastream/Smart H.264+ Dual-stream encoding
- DWDR, Day/Night (ICR), 3D-NR, ROI, AWB, AGC, BLC. HLC
- 3.6mm fixed lens (2.8mm Optional)
- IR Range of 30 Mtrs, IP67, PoE
- Support Built-in Mic
- Mobile Software: iCMOB, gCMOB
- CMS Software: KVMS Pro



CP-UNC-DA417PI 4-MD 4MP WDR Network IR Dome Camera - 40Mtr

- 1/3" 4MP PS CMOS Image Sensor (0.84667cm)
- 25/30fps@4MP(2560×1440)
- Instastream, H.265 and H.264+ dual-stream encodina
- WDR(120dB), Day/Night(ICR), 3D-DNR, ROI, AWB, AGC, BLC, HLC
- 2.8~12mm Motorized lens
- IR Range of 40 Mtrs, IP67, Micro SD Card, PoE
- Mobile Software: iCMOB, gCMOB
- CMS Software: KVMS Pro



CP-UNC-TA41ZPL5-MD 4MP WDR Network IR Bullet Camera - 50Mti

- 1/3" 4MP PS CMOS Image Sensor (0.84667cm)
- Max. 4MP(2560 × 1440)@25/30fps and 4MP(2688 × 1520)@20fps
- Instastream and H.264+ dual-stream encoding
- WDR(120dB), Day/Night(ICR), 3D-DNR, ROI, AWB, AGC, BLC, HLC
- 2.8~12mm Motorized lens
- IR Range of 50 Mtrs, IP67, Micro SD Card, PoE
- Mobile Software: iCMOB, gCMOB
- CMS Software: KVMS Pro



CP-UNC-TG41ZL12-VMD-V2 4MP AI IR Network Bullet Camera - 120Mtr.

- 1/1.8" 4MP PS CMOS Image Sensor (1.411 cm)
- Max. outputs 4MP(2688×1520)@50fps/60fps
- Instastream/H.265/Smart H.264+/H.264 coding
- Five streams for three-channel HD video WDR(140dB), Day/Night (ICR), 3D-DNR, EIS,
- Defog, ROI, AWB, AGC, BLC, HLC 8mm ~ 32mm Motorized lens
- IR Range of 120 Mtrs, IP67, IK10, Micro SD Card, ePoE, PoE+
- With deep learning algorithm, it supports people counting, face recognition, perimeter protection
- · Mobile Software: iCMOB, gCMOB, KVMS Pro



CP-UNC-DC41L5C-MDS 4MP Full HD WDR IR Dome Camera - 50Mtr.

- 1/2.7" 4Megapixel PS CMOS Image Sensor (6.858 centimeters)
- Max. 4MP(2688×1520)@30fps
- H.265+ and H.264+ triple-stream encoding
- WDR(120dB), Day/Night(ICR), 3D-DNR, ROI, AWB, AGC, BLC, HLC
- 3.6mm Lens (2.8mm, 6mm Optional)
- IR Range of 50 Mtrs, IP67, Micro SD Card, PoE
- Built-in Mic
- · Support Starlight Technology
- Mobile Software: iCMOB, gCMOB
- CMS Software: KVMS Pro



CP-UNC-TT41L3-VM 4MP IR AI Enforcement ANPR Camera

- 1/1.8" 4 MP starlight CMOS sensor (1.411 cm)
- H.265 and H.264 dual codec
- Maximum Resolution: 2688 × 1520@25/30fps
- Built-in 10mm~50mm lens
- The maximum illumination distance is 30 Mtr
- IP67, IK10 Rated
- ANPR







INTELLIGENT NETWORK VIDEO RECORDER





CP-UNR-104F1/108F1 4/8Ch. Network Video Recorder

- Support 8 channel IP camera input
 Instastream/H.265/Smart H.264+/H.264 codec decoding
- · Up to 8MP resolution preview and playback
- Max 80Mbps Network Bandwidth
- Support 1 SATA HDDs up to 8TB Each, 2 USB Ports (USB2.0)
- VGA/HDMI simultaneous video output, maximum resolution of HDMI is 1080P
- Support Multi-brand network cameras
 ONVIF Version conformance
- Mobile Software: iCMOB, gCMOB
- CMS Software: KVMS Pro



CP-UNR-208F2-I2 8Ch. Al Network Video Recorder

- 8 Channel IP video access
- Intelli Code/ H.265/Smart H.264+ /H.264/MJPEG
- Max. decoding capability: 6 x 1080p@30fps.
 Supports adaptive decoding
- 1-channel face detection and recognition (AI by NVR); 1-channel perimeter protection (AI by NVR); up to 10 face databases and 5,000 face images
- Al by camera: Face detection and recognition, perimeter protection and SMD
- Support 2 SATA HDDs up to 10TB Each, 2 USB Ports
- Support Multi-brand network cameras
- Mobile Software: iCMOB, gCMOB
- CMS Software: KVMS Pro



CP-UNR-4K2082-V2 8 Ch. 4K Network Video Recorder

- Support up to 1ch@8MP/4ch@1080P decoding
 Instastream/H.265/H.264 /H.264 codec decoding
- Up to 8MP Resolution Preview and Playback
- Max 80Mbps incoming bandwidth
- Support 2 SATA HDDs up to 10TB, 2 USB ports (2.0)
- HDMI / VGA simultaneous video output
- ONVIF Version 2.4 conformance
- Mobile Software: iCMOB, gCMOBCMS Software: KVMS, KVMS Pro



CP-UNR-216F2-I2 16Ch. Al Network Video Recorder

- 16 Channel IP video access
- Instastream/H.265/Smart H.264+/H.264/MJPEG
- Max. decoding capability: 6 x 1080p@30fps. Supports adaptive decoding
- 1-channel face detection and recognition (Al by NVR); 1-channel perimeter protection (Al by NVR); up to 10 face databases and 5,000 face images
- Al by camera: Face detection and recognition, perimeter protection and SMD
- Support 2 SATA HDDs up to 10TB each, 2 USB Ports
- Support Multi-brand network cameras
- Mobile Software: iCMOB, gCMOB
- CMS Software: KVMS Pro



CP-UNR-4K4162-V3 16 Ch. 4K Network Video Recorder

- Up to 16 channel IP camera input
- Instastream/H.265/Smart H.264+/H.264 codec decoding
- Max. decoding capability: 8 x 1080p@30fps.
 Supports adaptive decoding
- Supports mainstream cameras of ONVIF and RTSP protocols
- Supports 2 SATA HDDs up to 10TB each, 2 USB Ports
- VGA/HDMI simultaneous video output, maximum resolution of HDMI is 4K
- Supports multi-brand network cameras
- Al by Camera: Face detection, perimeter protection, IVS, people counting, heat map, and SMD
- Mobile Software: iCMOB, gCMOB
- CMS Software: KVMS Pro



CP-UNR-4K5164-FI 16Ch. 4K Al Network Video Recorder

- Up to 16 channel IP camera input
- Max. 384 Mbps incoming/recording/outgoing bandwidth
- Instastream/H.265/Smart H.264+/H.264/MJPEG codec decoding
- Al by Recorder: 2-channel face detection and recognition, 4-channel perimeter protection, and 8-channel SMD Plus
- Al by Camera: Face detection and recognition, perimeter protection, SMD Plus, metadata, ANPR, stereo analysis, heat map, and people counting
- Supports 4 SATA HDDs up to 16TB each, 3 USB Ports (2 USB 3.0)
- 2 HDMI/ 2 VGA simultaneous video output
- Supports Multi-brand network cameras
- Mobile Software: iCMOB, gCMOB
- CMS Software: KVMS Pro







CP-UNR-4K4322-V3 32Ch. 4K Network Video Recorder

- . Up to 32 channel IP camera input
- · Instastream/H.265/Smart H.264+/H.264/MJPEG
- Max. decoding capability: 8 x 1080p@30fps. Supports adaptive decoding
- · Supports mainstream cameras of ONVIF and RTSP protocols
- Support 2 SATA HDDs up to 10TB Each, 2 USB
- · VGA/HDMI simultaneous video output, maximum resolution of HDMI is 4K
- · Support Multi-brand network cameras
- · Al by Camera: Face detection, perimeter protection, IVS, people counting, heat map,
- Mobile Software: iCMOB, gCMOB
- · CMS Software: KVMS Pro



CP-UNR-4K4324-I 32 Ch. 4K Network Video Recorder

- 32 Channel IP video access
- · Access, storage or forwarding at 256 Mbps (160 Mbps when Al function enabled)
- Support 4 SATA HDDs up to 10TB Each, 2 USB
- · Al by NVR: 1-channel face detection and recognition; 2-channel perimeter protection; up to 10 face databases and 20,000 face images; 4-channel SMD Plus
- 1 HDMI / 1 VGA simultaneous video output
- Support Multi-brand network cameras
- Al by Camera: Face detection and recognition, perimeter protection; SMD Plus; ANPR; people counting; stereo analysis; heat map
- · Mobile Software: iCMOB, gCMOB
- CMS Software: KVMS Pro



CP-UNR-4K532R8-FI 32Ch. 4K Al Network Video Recorder

- Up to 32 channel IP camera input
- Max. 384 Mbps incoming/recording/outgoing bandwidth
- Instastream/H.265/Smart H.264+/H.264/MJPEG codec decoding
- Al by Recorder: 2-channel face detection and recognition, 4-channel perimeter protection, and 8-channel SMD Plus
- Support 8 SATA HDDs up to 16TB Each, 4 USB Ports (2 USB 3.0)
- Al by Camera: Face detection and recognition, perimeter protection, SMD Plus, metadata, ANPR, stereo analysis, heat map, and people counting
- Support RAID 0/1/5/6/10
- Support Multi-brand network cameras
- Mobile Software: iCMOB, gCMOB
- CMS Software: KVMS Pro



CP-UNR-4K5644-V2 64 Ch. 4K Network Video Recorder

- Up to 64 channel IP camera input
- Max 320Mbps incoming bandwidth
- Instastream/H.265/Smart H.264+/H.264/MJPEG
- · Up to 12MP resolution preview and playback
- Support 4 SATA HDDs up to 10TB Each, 3 USB Ports (2 USB 3.0, 1 USB 2.0)
- 2 HDMI / 2 VGA simultaneous video output
- Support Multi-brand network cameras
- ONVIF Version 2.4 conformance
- Mobile Software: iCMOB, gCMOB
- CMS Software: KVMS Pro



CP-UNR-4K5644-FI 64Ch. 4K Al Network Video Recorder


- Up to 64 channel IP camera input
- Max. 384 Mbps incoming/recording/outgoing bandwidth
- Instastream/H.265/Smart
- H.264+/H.264/MJPEG codec decoding
- Al by recorder: 2-channel face detection and recognition, 4-channel perimeter protection, and 8-channel SMD Plus
- Al by camera: Face detection and recognition, perimeter protection, SMD Plus, metadata, ANPR, stereo analysis, heat map, and people counting
- Support 4 SATA HDDs up to 16TB Each, 3 USB Ports (2 USB 3.0)
- 2 HDMI/ 2 VGA simultaneous video output
- Support Multi-brand network cameras
- Mobile Software: iCMOB, gCMOB
- CMS Software: KVMS Pro



CP-UNR-4K5648-V2 64 Ch. 4K Network Video Recorder

- Up to 64 channel IP camera input
- · Max 320Mbps incoming bandwidth
- Instastream/H.265/Smart H.264+/H.264/MJPEG Up to 12MP resolution preview and playback
- Support 8 SATA HDDs up to 10TB Each, 4 USB
- Ports (2 USB 3.0), 1 eSATA port
- 2 HDMI / 2 VGA simultaneous video output
- Support Multi-brand network cameras ONVIF Version 2.4 conformance
- Mobile Software: iCMOB, gCMOB
- CMS Software: KVMS Pro

XCP PLUS SWITCHES



POE SWITCHES



CP-DNW-HPU4H2-48-V2 6 Ports Switch with 4 PoE Ports & 2 Uplink Ports

- 4, 100Mbps; RJ45 ports, Supports Max. 30W Output of Single PoE Port
- Support IEEE802.3/802.3u/802.3x
- 2, 100Mbps, Transmission Distance: 0-100m
- · Easy and safe installation



CP-DNW-HPU8H2-96-V2 10 Ports Switch with 8 PoE Ports & 2 Uplink Ports

- 8, 10/100Mbps; RJ45 ports, Supports Max. 30W Output of Single PoE Port
- Support IEEE802.3i/802.3u/802.3x
- 2, 100Mbps, Transmission Distance: 0-100m
- Easy and safe installation



CP-DNW-GPU8G2-96-V3 10 Ports Switch with 8 Gigabit POE Ports & 2 **Gigabit Uplink Ports**

- . 8, 1000Mbps; RJ45 ports; Max. 30W Output of Single PoE Port
- Support
- IEEE802.3i/802.3u/802.3x/802.3af/802.3ab
- 2, 1000Mbps; Transmission Distance: 0-100m
- POF Power Budget: 96W



CP-ANW-HP16G2F1-N30 16EP+2G+1SFP AI PoE Switch

- Using CAT.5 network patch cords support power for the wireless AP and IP camera
- Networking standard: IEEE802.3af/at/bt
- PoE Watchdog Al Function: Detection frontend PoE cameras and PD. Automatic detection. Automatic restart
- Upload port automatic flip (Auto MDI / MDIX)
- FE ports can support 250 meters long distance transmission automatically
- 6KV lightning protection.8KV surge protection. anti-reverse connection, over-current protection, over-voltage protection, overtemperature protection, Short circuit protection
- The port Max power Output is 60 watts, it is convenient for high-power device
- Zero configuration feature power supply is automatically supplied to the adaptive equipment



CP-ANW-HP24G2-N30 24EP+2G AI POE Switch

- · Using CAT.5 network patch cords support power for the wireless AP/CPE and PTZ/IP camera
- Networking standard: IEEE802.3af/at/bt
- PoE Watchdog AI Function: Detection front-end PoE cameras and PD, Automatic detection, Automatic restart
- Upload port automatic flip (Auto MDI / MDIX)
- · 6KV lightning protection,8KV surge protection, anti-reverse connection, over-current protection, over-voltage protection, overtemperature protection, Short circuit protection
- Max. output power of the port is 60 watts, it is convenient for high-power device
- Zero configuration feature power supply is automatically supplied to the adaptive equipment



CP-ANW-HPU8G2-N12 8 Ethernet Port + 2 Gigabit Port Al PoE Switch

- · Using CAT.5 network patch cords support power for the wireless AP and IP camera.
- Networking standard: IEEE802.3af/at/bt.
- PoE Watchdog AI Function: Detection front-end PoE cameras and PD, Automatic detection, Automatic restart
- Upload port automatic flip (Auto MDI / MDIX)
- 6KV lightning protection, 8KV surge protection, anti-reverse connection, over-current protection, over-voltage protection, over-temperature protection. Short circuit protectiond
- The port power is 60 watts, it is convenient for high-power device.
- Zero configuration feature power supply is automatically supplied to the adaptive equipment.





UNV **NETWORK/IP**





IPC3612LB-SF28(40)-A 2MP Fixed Dome Network Camera

- · High quality image with 2MP, 1/2.8"CMOS
- · 2MP (1920*1080)@30/25fps; 720P
- (1280*720)@30/25fps · Ultra 265, H.265, H.264
- · Smart IR, up to 30m (98ft) IR distance
- · Day/night functionality
- 2D/3D DNR (Digital Noise Reduction)
- IP67 protection
- · Support PoE power supply
- · 3-Axis



IPC2122LB-SF28(40)-A 2MP Mini Fixed Bullet Network Camera

- · High quality image with 2MP, 1/2.8"CMOS
- 2MP (1920*1080)@30/25fps; 720P (1280*720)@30/25fps
- Ultra 265, H.265, H.264
- · Smart IR, up to 30m (98ft) IR distance
- · Day/night functionality
- 2D/3D DNR (Digital Noise Reduction)
- IP67 protection
- Support PoE power supply
- · 3-Axis



IPC3612LE-ADF28(40)KC-WL 2MP HD ColorHunter IR Fixed Eyeball Network

- High quality image with 2MP, 1/2.8"CMOS sensor
- 2MP (1920*1080) @30/25fps; 720P (1280*720) @30/25fps;
- Ultra 265, H.265, H.264, MJPEG
- 120dB true WDR technology enables clear image in strong light scene
- Support 9:16 Corridor Mode
- · Built-in Mic & Speaker
- Smart IR, up to 30m (98ft) IR distance
- · White Light, up to 30m (98ft) white light distance
- · Supports 128 G Micro SD card
- · IP67 protection, Support PoE power supply, 3-Axis



IPC2122LE-ADF28(40)KMC-WL 2MP HD ColorHunter Mini IR Fixed Bullet **Network Camera**

- High quality image with 2MP, 1/2.8"CMOS sensor · 2MP (1920*1080) @30/25fps; 720P (1280*720)
- @30/25fps: · Ultra 265, H.265, H.264, MJPEG
- 120dB true WDR technology enables clear image in strong light scene
- Support 9:16 Corridor Mode
- Built-in Mic & Speaker
- Smart IR, up to 30m (98ft) IR distance
- · White Light, up to 30m (98ft) white light distance
- · Supports 128 G Micro SD card
- IP67 protection
- · Support PoE power supply, 3-Axis



IPC3614LE-ADF28(40)KC-WL 4MP HD ColorHunter IR Fixed Eyeball Network Camera

- · High quality image with 4MP, 1/3"CMOS sensor · 4MP (2688*1520)@ 25/20fps; 4MP (2560*1440)@ 25/20fps; 3MP (2304*1296) @30/25fps; 2MP (1920*1080) @30/25fps;
- Ultra 265, H.265, H.264, MJPEG
- 120dB true WDR technology enables clear image in strong light scene
- Support 9:16 Corridor Mode
- Built-in Mic & Speaker
- · Smart IR, up to 30m (98ft) IR distance
- · White Light, up to 30m (98ft) white light distance
- · Supports 128 G Micro SD card
- ullet IP67 protection, Support PoE power supply, 3-Axis



IPC2124LE-ADF28(40)KMC-WL 4MP HD ColorHunter Mini IR Fixed Bullet **Network Camera**

- High quality image with 4MP, 1/3"CMOS sensor · 4MP (2688*1520)@ 25/20fps; 4MP (2560*1440)@ 25/20fps; 3MP (2304*1296) @30/25fps; 2MP (1920*1080) @30/25fps;
- Ultra 265, H.265, H.264, MJPEG
- 120dB true WDR technology enables clear image in strong light scene
- Support 9:16 Corridor Mode
- · Built-in Mic & Speaker
- Smart IR, up to 30m (98ft) IR distance
- White Light, up to 30m (98ft) white light distance
- · Supports 128 G Micro SD card
- IP67 protection, Support PoE power supply, 3-Axis





IPC3614I B-SF28(40)K-G 4MP Fixed Dome Network Camera

- High quality image with 4MP, 1/3"CMOS sensor
- · 4MP (2560*1440)@25/20fps; 3MP (2304*1296)@30/25fps; 2MP (1920*1080)@30/25fps; 720P (1280*720)@30/25fps
- Ultra 265, H.265, H.264, MJPEG
- Smart IR, up to 30m (98ft) IR distance
- · Supports 128 G Micro SD card
- Support PoE power supply
- · 3-Axis



IPC2124LB-SF28(40)-A 4MP Fixed IR Mini Bullet Network Camera

- High-quality image with 4MP, 1/3.0" CMOS sensor 4MP (2560*1440)@25/20fps; 3MP (2304*1296)@25/20fps; 2MP (1920*1080)@30/25fps; 720P (1280*720)@30/25fps • H.265, H.264, Smart IR,
- Up to 30m (98ft) IR distance
- Day/night functionality, 2D/3D DNR (Digital Noise Reduction)
- IP67 protection
- DC12V or PoE (IEEE 802.3af) power supply
- 3-Axis

NVR301-S3 Series 4/8/16-ch 1-SATA Ultra 265/H.265/H.264 NVR

- Support Ultra 265/H 265/H 264 video formats
- 4/8/16-channel input
- Support mainstream cameras of ONVIF conformance(Profile S, Profile G, Profile T) and RTSP protocols
- Support 1-ch HDMI, 1-ch VGA, HDMI at up to 4K(3840x2160) resolution
- HDMI and VGA simultaneous output
- Up to 4K resolution recording
- 1 SATA HDD up to 8TB
- Support cloud upgrade

NETWORK VIDEO RECORDER



NVR302-09/16S2 9/16 Channel 2 HDD NVR

- Support Ultra265/H.265/H.264 video formats
- 9/16-channel input
- Support mainstream cameras of ONVIF conformance(Profile S, Profile G, Profile T) and RTSP protocols
- HDMI and VGA simultaneous output
- Up to 8 Megapixels resolution recording
- 2 SATA HDDs, up to 8TB for each HDD
- ANR technology to enhance the storage reliability when the network is disconnected
- Support cloud upgrade



NVR302-32S 32 Channel 2 HDD NVR

- Support Ultra265/H.265/H.264 video formats
- 32-channel input
- Support mainstream cameras of ONVIF conformance(Profile S, Profile G, Profile T) and RTSP protocols
- HDMI and VGA simultaneous output
- Up to 8 Megapixels resolution recording
- · Accurate retrieval, instant playback
- 2 SATA HDDs, up to 8TB for each HDD
- ANR technology to enhance the storage reliability when the network is disconnected
- Support cloud upgrade



NVR304-E2 Series 64 Channel 4 HDD NVR

- Support Ultra H.265/H.265/H.264 video formats
- 64-channel input
- Supports mainstream cameras of ONVIF conformance(Profile S, Profile G, Profile T) and
- Support 1-ch HDMI, 1-ch VGA. HDMI up to 4K (3840x2160) resolution
- HDMI and VGA independent outputs provided
- Up to 12 Megapixels resolution recording 4 SATA HDDs, Up to 8TB for each HDD
- Support RAID 1, 5
- Various fisheye dewarping modes for live view and playback for both web interface and GUI ANR technology to enhance the storage
- reliability when the network is disconnected
- Support cloud upgrade



HIKVISION **NETWORK/IP**





DS-2CD1323G0E-I 2 MP Fixed Turret Network Camera

- · High quality imaging with 2 MP resolution
- Efficient H.265+ compression technology
- Clear imaging against strong back light due to DWDR technology
- Water and dust resistant (IP67)
- EXIR 2.0: advanced infrared technology with long IR range



DS-2CD1023G0E-I 2 MP Fixed Bullet Network Camera

- High quality imaging with 2 MP resolution
- Efficient H.265+ compression technology
- Clear imaging against strong back light due to DWDR technology
- Water and dust resistant (IP67)
- EXIR 2.0: advanced infrared technology with long IR range



DS-2CD1323G2-IUF 2 MP MD 2.0 Fixed Turret Network Camera

- 8, 1000Mbps; RJ45 ports; Max. 30W Output of Single PoE Port
- Support
- IEEE802.3i/802.3u/802.3x/802.3af/802.3ab
- 2. 1000Mbps: Transmission Distance: 0-100m
- POE Power Budget: 96W



DS-2CD1023G0-IUF 2 MP Build-in Mic Fixed Bullet Network Camera

- · High quality imaging with 2 MP resolution
- Efficient H.265+ compression technology
- Clear imaging even with strong back lighting due to DWDR technology
- Water and dust resistant (IP67)
- EXIR 2.0: advanced infrared technology with long IR range
- Built-in microphone for real-time audio



DS-2CD1027G2-L 2 MP ColorVu MD 2.0 Fixed Bullet Network

- High quality imaging with 2 MP resolution
- 24/7 colorful imaging
- Support Human and Vehicle Detection
- Water and dust resistant (IP67)
- Efficient H.265+ compression technology
- Support on-board storage up to 256GB (SD card slot)(Optional)
- Built-in microphone for real-time audio security(Optional)



DS-2CD2326G2-ISU/SL 2 MP AcuSense Strobe Light and Audible Warning Fixed Turret Network Camera

- · High quality imaging with 2 MP resolution
- Excellent low-light performance with powered-by-DarkFighter technology
- Clear imaging against strong back light due to 120 dB true WDR technology
- Efficient H.265+ compression technology
- Focus on human and vehicle classification based on deep learning
- · Active strobe light and audio alarm to warn intruders off
- Provide real-time security via built-in two-way audio
- Water and dust resistant (IP67)





NETWORK CAMERA



DS-2CD1027G2H-LIU 2 MP ColorVu with Smart Hybrid Light Fixed **Bullet Network Camera**

- · High quality imaging with 2 MP resolution
- Support Human and Vehicle Detection
- Smart Hybrid Light: advanced technology with long range
- Efficient H.265+ compression technology
- Support on-board storage up to 512 GB (SD card slot) (Optional)
- Built-in microphone for real-time audio security
- Water and dust resistant (IP67)



DS-2CD1327G2H-LIU Hikvision 2MP IP ColorVu with Smart Hybrid **Light Fixed Dome Camera**

- · High quality imaging with 2 MP resolution
- Support Human and Vehicle Detection
- Smart Hybrid Light: advanced technology with
- Efficient H.265+ compression technology
- Support on-board storage up to 512 GB (SD card slot) (Optional)
- Built-in microphone for real-time audio security
- Water and dust resistant (IP67)



DS-2CD1323G2-LIUF/SL 2 MP Smart Hybrid Light Fixed Turret Network

- · High quality imaging with 2 MP resolution
- Support Human and Vehicle Detection
- Smart Hybrid Light: advanced technology with long range
- Efficient H.265+ compression technology
- Support on-board storage up to 512 GB (SD)
- · Provide real-time security via built-in two-way
- · Water and dust resistant (IP67)



DS-2CD1023G2-LIUF/SL 2 MP Smart Hybrid Light Fixed Bullet Network Camera

- · High quality imaging with 2 MP resolution
- Support Human and Vehicle Detection
- Smart Hybrid Light: advanced technology with
- Efficient H.265+ compression technology
- Support on-board storage up to 512 GB (SD card slot)
- · Provide real-time security via built-in two-way audio
- · Water and dust resistant (IP67)



DS-2CD1347G2H-LIU 4 MP ColorVu with Smart Hybrid Light Fixed **Turret Network Camera**

- High quality imaging with 4 MP
- Support Human and Vehicle Detection
- Smart Hybrid Light: advanced technology with long range
- Efficient H.265+ compression technology
- Support on-board storage up to 512 GB (SD card slot) (Optional)
- Built-in microphone for real-time audio security
- Water and dust resistant (IP67)



DS-2CD1047G2H-LIU 4 MP ColorVu with Smart Hybrid Light Fixed **Bullet Network Camera**

- High quality imaging with 4 MP resolution
- Support Human and Vehicle Detection
- Smart Hybrid Light: advanced technology with long range
- Efficient H.265+ compression technology
- Support on-board storage up to 512 GB (SD card slot) (Optional)
- Built-in microphone for real-time audio security
- Water and dust resistant (IP67)



DS-2CD1067G2H-LIU 6 MP ColorVu with Smart Hybrid Light Fixed **Bullet Network Camera**

- High quality imaging with 6 MP resolution
- Support Human and Vehicle Detection
- Smart Hybrid Light: advanced technology with long range
- Efficient H.265+ compression technology
- Support on-board storage up to 512 GB (SD card slot) (Optional)
- Built-in microphone for real-time audio security
- · Water and dust resistant (IP67)



DS-2CD2T67G2P-LSU/SL 6 MP Panoramic ColorVu Fixed Bullet Network

- High quality imaging with 6 MP resolution
- · One image that presents all the scenes covered by the camera
- 24/7 colorful imaging
- Efficient H.265+ compression technology
- Clear imaging against strong back light due to 130 dB WDR technology
- Focus on human and vehicle classification based on deep learning
- Active strobe light and audio alarm to warn intruders off
- · Water and dust resistant (IP67)



DS-2CD2367G2P-LSU/SL 6 MP Panoramic ColorVu Fixed Turret Network

- · High quality imaging with 6 MP resolution
- One image that presents all the scenes covered by the camera
- 24/7 colorful imaging
- Efficient H.265+ compression technology
- Clear imaging against strong back light due to 130 dB WDR technology
- Focus on human and vehicle classification based on deep learning
- Active strobe light and audio alarm to warn intruders off
- · Water and dust resistant (IP67)

NETWORK CAMERA



DS-2CD1043G0-I 4MP Fixed Bullet Network Camera

- High-quality imaging with 4 MP resolution
- Efficient H.265+ compression technology
- · Clear imaging even with strong backlighting due to 120 dB WDR
- Water and dust-resistant (IP67)
- EXIR 2.0: advanced infrared technology with a long IR range
- UF: Built-in microphone for real-time audio



DS-2CD1343G0-I 4 MP Fixed Turret Network Camera

- High quality imaging with 4 MP resolution
- Efficient H.265+ compression technology
- Clear imaging even with strong back lighting due to 120 dB WDR
- Water and dust resistant (IP67)
- EXIR 2.0: advanced infrared technology with long IR range
- -UF: Built-in microphone for real-time audio security
- -UF: Support up to 256 GB SD card storage



DS-2CD1343G2-I(UF) 4 MP MD 2.0 Fixed Dome Network Camera

- High-quality imaging with 4 MP resolution
- Supports Human and Vehicle Detection
- Water and dust-resistant (IP67)
- · Clear imaging even with strong backlighting due to 120 dB WDR
- Efficient H.265+ compression technology
- EXIR 2.0: advanced infrared technology with a long IR range
- Supports on-board storage up to 256GB (SD) card slot) (Optional)
- · Built-in microphone for real-time audio security (Optional)



DS-2CD1347G0-L(UF) 4 MP ColorVu Fixed Turret Network Camera

- High quality imaging with 4 MP resolution
- · Excellent low-light performance
- Efficient H.265+ compression technology
- Water and dust resistant (IP67)
- · 24/7 colorful imaging



DS-2CD1047G0-L(UF) 4 MP ColorVu Fixed Mini Bullet Network Camer

- High quality imaging with 4 MP resolution
- Excellent low-light performance
- Efficient H.265+ compression technology
- Water and dust resistant (IP67)
- 24/7 colorful imaging



DS-2CD1643G0-I(Z) 4 MP Varifocal Bullet Network Camera

- · High quality imaging with 4 MP resolution
- Efficient H.265+ compression technology
- Clear imaging even with strong back lighting due to 120 dB WDR
- Up to 256 GB SD card slot for storage
- · 2.8 to 12 mm motorized varifocal lens for easy installation and monitoring
- Water and dust resistant (IP67)
- EXIR 2.0: advanced infrared technology with long IR range



DS-2CD1043G2-LIU(F) 4 MP Smart Hybrid Light Fixed Bullet Network

- · High quality imaging with 4 MP resolution
- Support Human and Vehicle Detection
- Smart Hybrid Light: advanced technology with long range
- Built-in microphone for real-time audio
- Water and dust resistant (IP67)
- Efficient H.265+ compression technology
- Support on-board storage up to 512 GB (SD card slot) (Optional)



DS-2CD1343G2-LIU(F) 4 MP Smart Hybrid Light Fixed Turret Network

- High quality imaging with 4 MP resolution
- · Support Human and Vehicle Detection
- Smart Hybrid Light: advanced technology with long range
- Built-in microphone for real-time audio security
- Efficient H.265+ compression technology
- Support on-board storage up to 512 GB (SD card slot) (Optional)
- Water and dust resistant (IP67)



DS-2CD2046G2-IU/SL 4 MP AcuSense Strobe Light and Audible Warning Fixed Mini Bullet Network Camera

- High quality imaging with 4 MP resolution
- Excellent low-light performance with powered-by-DarkFighter technology
- Clear imaging against strong backlight due to 120 dB true WDR technology
- Efficient H.265+ compression technology
- · Focus on human and vehicle targets classification based on deep learning
- · Active strobe light and audio alarm to warn intruders off
- · Provides real-time security via built-in two-way audio
- Water and dust resistant (IP67)

HIKVISION **NETWORK VIDEO** RECORDER



NETWORK VIDEO RECORDER



DS-7104NI-Q1/M 4-ch Mini 1U NVR

- H.265+/H.265/H.264+/H.264 video
- Up to 40 Mbps incoming bandwidth, and 60 Mbps outgoing bandwidth
- Up to 4-ch network camera inputs
- Up to 4-ch 1080p decoding capability
- HDMI and VGA simultaneous output



DS-7604NI-Q1 4-ch 1U 4K NVR

- Up to 4-ch IP camera inputs
- H.265+/H.265/H.264+/H.264 video
- Up to 1-ch@8 MP/3-ch@4 MP/6ch@1080p decoding capacity
- Up to 40 Mbps incoming bandwidth



DS-7604NXI-K1 4-ch 1U K Series AcuSense 4K NVR

- . Up to 4-ch IP camera inputs
- H.265+/H.265/H.264+/H.264 video formats
- Up to 1-ch@12 MP or 2-ch@8 MP or 4-ch@4 MP or 8-ch@1080p decoding capacity
- Up to 40 Mbps incoming bandwidth
- Adopt Hikvision Acusense technology to minimize manual effort and security costs



DS-7108NI-Q1/M 8-ch Mini 1U NVR

- H.265+/H.265/H.264+/H.264 video compression
- Up to 60 Mbps incoming bandwidth, and 60 Mbps outgoing bandwidth
- Up to 8-ch network camera inputs
- Up to 4-ch 1080p decoding capability
- HDMI and VGA simultaneous output



DS-7608NI-Q1 8-ch 1U 4K NVR

- Up to 8-ch IP camera inputs
- H.265+/H.265/H.264+/H.264 video formats
- Up to 1-ch@8 MP/3-ch@4 MP/6-ch@1080p decoding capacity
- Up to 80 Mbps incoming bandwidth



DS-7608NXI-K1 8-ch 1U K Series AcuSense 4K NVR

- Up to 8-ch IP camera inputs
- H.265+/H.265/H.264+/H.264 video formats
- Up to 1-ch@12 MP or 2-ch@8 MP or 4-ch@4 MP or 8-ch@1080p decoding capacity
- Up to 80 Mbps incoming bandwidth
- Adopt Hikvision Acusense technology to minimize manual effort and security costs



DS-7616NI-Q1 16-ch 1U 4K NVR

- . Up to 16-ch IP camera inputs
- H.265+/H.265/H.264+/H.264 video
- Up to 1-ch@8 MP/3-ch@4 MP/6ch@1080p decoding capacity
- Up to 160 Mbps incoming bandwidth



DS-7616NI-Q2 16-ch 1U 4K NVR

- · Up to 16-ch IP camera inputs
- H.265+/H.265/H.264+/H.264 video formats Up to 1-ch@8 MP/3-ch@4 MP/6-ch@1080p
- decoding capacity
- Up to 160 Mbps incoming bandwidth
- 2 SATA interfaces connectable for recording and backup



DS-7616NXI-K1 16-ch 1U K Series AcuSense 4K NVR

- Up to 16-ch IP camera inputs
- H.265+/H.265/H.264+/H.264 video formats
- Up to 1-ch@12 MP or 2-ch@8 MP or 4-ch@4 MP or 8-ch@1080p decoding capacity
- Up to 160 Mbps incoming bandwidth
- Adopt Hikvision Acusense technology to minimize manual effort and security costs



NETWORK VIDEO RECORDER



DS-7616NXI-K2 16-ch 1U K Series AcuSense 4K NVR

- Up to 16-ch IP camera inputs
- H.265+/H.265/H.264+/H.264 video formats
- Up to 2-ch@12 MP or 3-ch@8 MP or 6-ch@4 MP or 12-ch@1080p decoding capacity
- Up to 160 Mbps incoming bandwidth
- Adopt Hikvision Acusense technology to minimize manual effort and security costs



DS-7632NXI-K2 32-ch 1U K Series AcuSense 4K NVR

- Up to 32-ch IP camera inputs
- H.265+/H.265/H.264+/H.264 video formats
- Up to 2-ch@12 MP or 3-ch@8 MP or 6ch@4 MP or 12-ch@1080p decoding capacity
- Up to 256 Mbps incoming bandwidth
- Adopt Hikvision Acusense technology to minimize manual effort and security



DS-7732NXI-K4 32-ch 1.5U K Series AcuSense 4K NVR

- Up to 32-ch IP camera inputs
- H.265+/H.265/H.264+/H.264 video
- Up to 2-ch@12 MP or 3-ch@8 MP or 6ch@4 MP or 12-ch@1080p decoding capacity
- Up to 256 Mbps incoming bandwidth
- Adopt Hikvision Acusense technology to minimize manual effort and security costs



DS-7764NI-M4 64-ch 1.5U 8K NVR

- H.265+/H.265/H.264+/H.264 video formats
- Up to 64-ch IP camera inputs
- Up to 2-ch@32 MP/2-ch@24 MP/4-ch@12 MP/8-ch@8 MP/16-ch@4 MP/32-ch@1080p decoding capacity
- Up to 400 Mbps incoming bandwidth and 400 Mbps outgoing bandwidth
- 2 HDMI and 1 VGA interfaces, 8K or dual 4K video outputs



DS-8664NI-I8 64-ch 2U 4K NVR

- New logical and visualized GUI design
- Dual-OS design to ensure high reliability of system running
- ANR technology to enhance the storage reliability when the network is disconnected
- HDD hot swap with RAID0, RAID1, RAID5, RAID6 and RAID10 storage scheme configurable
- Up to 64-ch 12 MP IP cameras can be connected
- Connectable to the third-party network cameras
- H.265+ compression effectively reduces the storage space by up to 75%
- Full channel recording at up to 12MP resolution



DS-7604NXI-K1 4-ch 1U K Series AcuSense 4K NVR

- Up to 4-ch IP camera inputs
- H.265+/H.265/H.264+/H.264 video formats
- Up to 1-ch@12 MP or 2-ch@8 MP or 4-ch@4 MP or 8-ch@1080p decoding capacity
- Up to 40 Mbps incoming bandwidth
- Adopt Hikvision Acusense technology to minimize manual effort and security costs

COMMERCIAL CATEGORY







VIDEO DOOR **PHONE**







DS-KIS602 Video Intercom KIT

- IP video intercom kit for villa or house, only one call button
- DS-KD8003-IME1/Surface x1
- DS-KH6320-WTE1 x1
- 4 port standard PoE switch x1
- 16GB TF card x1
- European power supply adaptor included (please mark for other standards when you





DS-KIS604-S(C) IP video intercom kit

- Network video intercom bundle for villa or house
- One call button for easier calls
- Convenient Hik-Connect App mobile control
- Stores messages and captured pictures in the TF card
- Including: DS-KV8113-WME1(C) \times 1, DS-KH6320-WTE1 × 1, 4-port standard PoE switch × 1. 16 GB TF card × 1
- Power adapter included in the package





DS-KIS605-P

- Indoor Station:
- · User friendly design
- · 7-inch colorful touch screen with resolution 1024 × 600, Standard PoE
- Views live video of door stations and linked cameras
- Villa Door Station:
- Standard PoE, 2 MP HD Camera
- Noise suppression and echo cancellation
- Low illumination
- · Access control functions, Tamper-proof
- Configuration remotely via Web, 2.4 GHz Wi-Fi



DS-KV8413-WMF1(B) 4 Button Metal Villa Door Station

- · Support Wifi, convenient setting up and no wiring required
- Support web configuration
- Aluminum alloy, Nice industry design, IP65, IK08, 3 indicator integrated
- Internal Mifare card reader, 4-ch Indoor station access control
- Noise suppression and echo cancellation
- 2MP HD Camera with IR supplement
- Standard PoE/12 VDC



DS-KIS204T Villa Analog Kit

- · 4-wire analog video intercom bundle for villa or house
- One call button for easier calls
- Supports captured picture storage
- Including DS-KB2411T-IM and DS-KH2220-S, 5meter 4-wire cable, and other accessories
- European power supply adaptor included (please mark for other standards when you order)



DS-KH6320-WTE1 KH6 Series IP-Based Indoor Station

- 7-inch TFT touch screen with 1024 x 600 resolution
- Convenient Hik-Connect APP Mobile Control
- Receive calls, open the door, and live view remotely. Easy to use without PC
- Easy wizard for quick setup
- · Configure the whole system on one touch screen
- · Live view of the door station and cameras in public areas
- · Support voice messages when there is no response from the indoor station





Panasonic Video Intercom













VL-SVN511 Panasonic Video Intercom System

- · Smartphone Connect and Wifi
- E-mail Notification
- Voice Change function
- · Night vision with LED Lamp

VL-SW272

Panasonic Wireless Video Intercom System

- · Wireless Monitor
- 7 inch large LCD monitor
- Voice Change Function
- Night Vision with LED Lamp
- Highly Expandable
- 7-inch wide colour display
- Picture recording
- · Electric Lock Release Support

VL-SV71 IP Intercom Kit

- · Picture recording function
- Highly Expandable
- 7 inch large LCD Monitor
- Night vision with LED Lamp

CP PLUS Video Intercom



CP-PVK-70MTH1 7" (17.78cm) Video Door Phone Kit With Memory

- 7" Colour TFT-LCD Display (17.78cm)
- Feather-touch Keypad
- Super Slim Hands-free Model with Memory (100 Snapshots)
- High Resolution Colour Camera 700TVL, with IR LED for Night Vision
- Rain Cover & Mount Angle Available
- Supports Additional 3 Indoor Units & 2 Outdoor Units, 2 CCTV In
- Supports Intercom
- Supports 1 CCTV Out for Recording
- · Supports 6 Different Melodies, Do Not Disturb
- Outdoor Dimension: 124mm x 40mm x 25mm



CP-UVK-711M IP Villa Door Station & Indoor Monitor

- High definition camera; WDR
- IP65(Silicone sealant is needed. For details, see the quick start guide.)
- Supports auto IR illumination and D/N
- Card/app remote/indoor monitor unlock
- Supports two-way voice call; support calls between door stations and app
- 10,000 cards, Tamper Alarm
- Support standard PoE power supply IP Indoor Monitor, IPC surveillance
- Alarm integration
- Embedded 8GB SD card
- · High performance



CP-PAV-C341 4 Door Bell Outdoor Unit

- 1/4" Smart Sensor (0.635cm)
- 4 Monitor Button (4x3=12 monitors support)
- One Lock Support
- High-resolution Outdoor unit for Clearer Identification
- Built-in IR for Night Vision

SECUREYE LOCKS



ELECTRONIC LOCK



S-100EL Flectronic Door Locks

- Mechanical Based Lock
- Single Cylinder for Key Lock Suitable for Home/Office
- Lock Opening Mode Key
- High Strength Material SS



S-280SF Single leafs 1200lbs/500kg EM Lock

- Collinear Load Test 600/1200 pounds
- Mov Reverse current protection
- Red/Green led Indicates door status Door status sensor (No/Nc/Com)
- Anodized Aluminum housing
- Anit-Residual magnesium designed



S-5BL Fail Safe Electric Bolt

- Lock Delay Time Programmable
- Designed for Strength and Long Life
- Suitable for all Kind of the Door Connection 5 Line Lock
- Fail Safe: Locked when energized
- Superior Strength Aluminum Alloy

ACCESS CONTROL



S-B4CB **RFID Fingerprint Access Control**

- One Relay, Optical Fingerprint Module
- 500DPI Resolution Optical Sensor
- 1000 User Capacity
- Fingerprint, Card, Password Wiegand 26 bit Output, Door Bell
- Proximity Card Supported



S-B2CB **Standalone Single Door Controller**

- User Capacity: 450 Card & Password
- Built-in Buzzer
- Weigand output: Wg26
- Read Card Distance: 2 ~ 8CM
- External Door Bell



S-BSB Stainless Steel Exit Switch

- Design with No Mechanical Bolt
- Tested to 500000 Cycles
- Stainless Steel Panel
- Available in 2 & 3 Wire
- The Best Choice of Access Control

2 Contact Suitable for All Kinds of Locks





Biometric & Facial Recognition **Attendance**



SECUREYE Biometric Attendance Systems



Face Biometric Device

- Color 6.1cm(2.4)TFT LCD
- 600 DPI High Resolution Optical Sensor
- 16 Keypad
- · Professional Access Control
- 2 HD Camera
- Communication TCP/IP/Wi-Fi(Optional)



Face Attendance Device

- Colour 10.92cm (4.3) TFT LCD
- 16 Touch Keypad
- 2 HD Cameras to Capture Photos
- High Resolution Optical (600 DPI)
- Supports Access Control
- Communication TCP/IP/Wi-Fi (Optional)/RS485/3G



S-FB4K **Face Attendance Machine**

- Face capacity:1500 & 3000 Optional)
- Fingerprint capacity: 5000 (Optional 10,000 & 50,000)
- High Resolution Optical Sensor(600 DPI)
- Support Access Control
- Communication TCP/IP/Wi-Fi (Optional)/3G

MATRIX Biometric Attendance Systems



ace and RFID Card Based Access Control and Time-Attendance Door Controller

- Multi-Credentials inclusive of Contactless Technology - Face, BLE, PIN, and RFID Card Multi-Connectivity Options - Wi-Fi, PoE,
- Ethernet, BLE, USB, 3G/4G/LTE
- Massive Storage Capacity 50,000 Users, 2,00,000 Face Templates
- Deep Face Learning Algorithm with Adaptive Understanding



COSEC ARGO FOX Finger and RFID Card Based Ultra Fast Biometric **Door Controller**

- Multi-Credential Support Fingerprint, BLE, RFID Card, PIN
- Massive Storage Capacity 50,000 Users, 5,00,000 Event Logs
- Finger Template Capacity:- 1:N Mode: 25.000.1:1 Mode: 1.00.000
- Multi-Connectivity Options Wi-Fi. PoE. Ethernet, BLE, USB, 3G/4G/LTE
- Suitable for Access Control and Time-Attendance Applications



Finger and RFID Card Based Biometric Doo

- Multi-Credential Support Fingerprint, BLE, RFID Card, PIN
- Massive Storage Capacity 50,000 Users, 5,00,000 Event Logs
- Finger Template Storage 1:N Mode: 9,600,1:1 Mode: 1,00,000
- Multi-Connectivity Options Wi-Fi, PoE. Ethernet, BLE, USB, 3G/4G/LTE
- · Suitable for Access Control and Time-Attendance Applications













YDME 100 NxT Black

- Multiple Access Options
- Emergency Power Supply
- · Mechanical Key Access Lasting Battery Life
- Smart Door Lock, Black, Fingerprint, PIN, RFID, Manual Key Access



YDR 41A

- Multiple Access Options.
- Auto-Lock & Unlock as You Come & Go.
- Designed for Double Door & Sliding Doors Biometric | PIN Code | Remote Control Yale Home App** | Wi-Fi* | Bluetooth*



YDD 724A

- Biometric | PIN Code | Mechanical Key
- Remote Control | RFID Card
- Yale Home App** | Wi-Fi* | Bluetooth*



YMI70A RB push & pull smart lock

- Single Push Action | Biometric | PIN Code | RFID Card | Mechanical Key | Remote Control | Yale Home App** | Wi-Fi* | Bluetooth
- *Wi-Fi sold separately.
- **Yale Home kit is required for Yale home app functionalities (sold separately).



Yale Luna Pro+ Push Pull Mortise

- Face recognition: Available
- Fingerprints: Available
- PIN Code: Available
- RFID Key Tag: Available Mechanical Key Override: Available
- Bluetooth: Available
- WiFi Connection: Available
- Remote Control: Available (Optional Sold Separately)



YEL-200MB YALE ELECTRIC RIM LOCK

- Cycles Tested: 500,000 cycles tested
- Easy installation : Fits a wide range of doors
- Mechanical Key: Mechanical override cylinder
- · Salt Spray : Salt spray test 108 hours
- 5 Pin : Nickel brass plated computerized dotted keys







SECURICO INTRUSION ALARM



GSM CONTROL PANELS



SEC GX 4016 GSM A1 GALAXY 4016 GSM CONTROL PANEL

- Micro-controller based 24 zones control panel
- Can expand up to 40 wired zones with expansion modules
- Can connect up to 14 wireless sensors and key fobs by adding wireless receiver
- Automatic arming and disarming, 1 admin user and 3 defined sub users
- Inbuilt 2 Voice Message 20 number GSM dialer with multiple alarm and status SMS.



SEC GX 4016 GSM A6 GALAXY 12 ZONE 4016 GSM CONTROL PANEL

- Micro-controller based 12 zones control panel Automatic arming and disarming.
- Inbuilt 2 Voice Message 20 number GSM dialer with multiple alarm and status SMS.
- Android app to operate and program panel and receive alarm and status messages from panel.



SEC GX 4016 GSM A7 GALAXY 4 ZONE 4016 GSM CONTROL PANEL

- Microcontroller-based 4-zone control panel.
- Automatic arming and disarming, optional and programmable.
- Inbuilt 2 Voice Message 20-number GSM dialler with multiple alarm and status SMS.
- Alarm information communicated over GSM with alarm type, zone number, time and date.
- Separate remote keypad with 16x4 LCD
- display and 16-key backlit keypad.

 Can attach up to 2 additional LCD display
- remote keypads.
- Android app to operate and program panel.







SEC GX 4816 IP A1 SECURITY & AUTOMATION IOT HUB 24 Zone IP Panel

- · Micro-controller based security and automation IoT Hub
- 24 zone panel expandable up to 48 zones
- 12 digital input zones expandable to 28 zones
- 2 monitored fire zones to connect up to 16 smoke detectors / heat detectors / manual call points per zone
- Zones for mains AC and UPS Power sensing
- 1 dedicated tamper zone
- Separate Remote Keypad with 16x2 LCD display (optional and not included)



SEC 12 GGI PRESIDENT MULTICOMM GGI

- 12 Zone Control Panel with inhuilt TCP/IP GPRS & GSM communication.
- Failover and redundancy functions for alarm communication.
- Automatic Arming & Disarming, Windows software for TCP/IP, GSM and GPRS settings.
- 10 programmable zones, can connect Separate Remote Key Pads, Inbuilt Power Supply.



SEC 08S GGPI Solitaire 8 Multi-Communication Intruder Aları Panel

- 8 Zone Control Panel with inbuilt 2 Message 30 Number PSTN Speech Dialer
- TCP/IP, GPRS & GSM communication
- · Failover and redundancy functions for alarm communication.
- · Home Automation System with 4 Appliance Control.
- Automatic Arming & Disarming & Remote Access through Telephone

SENSORS



SEC MS4 **MAGNETIC DOOR CONTACT 4 WIRE**

- Opening Gap 12-15mm
- Tamper Loop
- ABS Housing
- Colour options white and black.



SEC MSC MAGNETIC CONTACT CONCEALED PENCIL TYPE

- Concealed Type Easily Recessed In Frames
- Hole can be made with standard drill bit
- Opening Gap 10-13 mm
- ABS Housing
- Colour options white and black.



SEC GX 4016 GSM A7 **GALAXY 4 ZONE 4016 GSM CONTROL PANEL**

- Microcontroller based Dual Technology Magnetic Contact with inbuilt Digital Multi Function Detector.
- Magnetic Contact Opening Gap 12-15mm.
- Inbuilt Digital Multi Function Detector.
- Detects vibration
- Breaking of glass
- · Cutting of aluminum frames or grills.



SEC DTPIR **DUAL TECH MICROWAVE & P.I.R.** MOTION SENSOR

- Dual Technology Microwave & PIR
- Combination Sensor with Intelligent Pet Immunity and no false detection.
- Detection Range 12m
- · Multi Angle wall bracket.



SEC QPIR QUAD P.I.R. MOTION SENSOR

- Digital Quad Technology PIR Motion Sensor with Intelligent Pet Immunity.
- Detection Range 12m
- Multi Angle wall bracket.
- · ABS Housing.



SEC MFD **MULTI FUNCTION DETECTOR**

- · Detects vibration, breaking of glass
- · Cutting of aluminum frames or grills
- **ABS Housing**
- Hi low sensitivity setting with preset for fine tuning
- · 2 LED indication.







SEC GBD 1 ACOUSTIC GLASS BREAK DETECTOR

- · Intelligent acoustic-based detection of breaking glass.
- Detecting destruction of the following types of glasses: common, quenched, patterned, armored, multilayer, and protected with polymer tape (laminated)
- Detection range: 6-9m
- Installation height: 2m
- Alarm Message Duration: Not less than 2 sec
- Generates Alarm message by alarm loop contact opening



SEC BDD 40 BEAM DETECTOR 40 Mtr

- Beam Detector with dual beam
- 40 meter detection range
- High grade spherical lens
- Automatic Gain Control
- Adjustable beam interruption period



SEC SC HEAVY DUTY SHUTTER CONTACT

- Extra Sturdy Glass filled nylon housing
- 4 wire (2 Tamper wires, 2 zone wires)
- Contact rating 10W, Min.
- Opening gap 35-40mm.
- Unique design.



SEC GLD GAS LEAK DETECTOR 12V

- Microprocessor Controller
- LED display of the alarm LEL
- High reliability sensor
- AC 110V-230V wide range of operating voltage
- Indication of automatic fault checking



SEC SDR **SOUNDER 12V**

- High power 130 db
- Police Siren Sound
- Suitable for Indoor and Outdoor application
- Tamper Loop
- Two sound speed options available
- white ABS Housing.



SEC ISDR 1 INTERNAL SOUNDER

- High power 105 db
- Police Siren Sound
- Suitable for Indoor and limited outdoor application
- White and Red ABS housing.



SEC PSE PANIC SWITCH ECONOMY

- · Micro switch technology
- Auto reset button
- · In-built tamper switch
- Strong ABS body.



SEC GX 4016 RKP1 **REMOTE KEY PAD FOR GALAXY 4016** CONTROL PANELS

- Remote key pad for Galaxy 4016 control panels with 16X4 backlit LCD.
- . 16 button key pad.
- Inbuilt buzzer and ABS housing.



SEC WIAK GD WIRELESS INTRUDER ALARM KIT WITH GSM

- 01 Hawk Panel
- 01 Wireless Keyfob
- 01 Wireless Regnetic Contact 01 Wireless PIR Motion Sensor
- 01 GSM Auto Dailer

NJNX WIRELESS INTRUSION ALARM



HUB/EXTENDER

Security system control panel supporting photo verification of alarms

- · Compatible with Jeweller devices
- Ethernet, Wi-Fi, 2 SIM cards (2G/3G/4G)
- Up to 200 devices
- Up to 100 cameras or DVRs
- Up to 5 radio signal range extenders
- Up to 200 users
- Up to 25 security groups
- Up to 64 automation scenarios

Security system control panel supporting photo verification of alarms

- Compatible with Jeweller devices Ethernet and 2 SIM cards (2G/3G/4G)
- Up to 100 devices
- Up to 25 cameras or DVRs
- Up to 5 radio signal range extenders
- Up to 50 users
- Up to 9 security groups
- Up to 32 automation scenarios

Hub 2 (2G) Security system control panel supporting photo verification of alarms

- · Compatible with Jeweller devices · Ethernet and 2 SIM cards (2G)
- Up to 100 devices
- . Up to 25 cameras or DVRs
- Up to 5 radio signal range extenders
- Unito 50 users
- . Up to 9 security groups
- Up to 32 automation scenarios

Hub Security system control panel

- Compatible with Jeweller devices
- Ethernet, SIM card (2G)
- Up to 100 devices
- Up to 10 cameras or DVRs
- 1 radio signal range extender
- Up to 50 users
- Up to 9 security groups
- Up to 5 automation scenarios

Radio signal range extender supporting photo verification of alarm

- Alarm transmission in 0.3 second
- Up to 38 hours of operation from backup battery
- Communication with the hub at a distance of up to 1,700 m
- Photo verification

Radio signal range extender

- Alarm transmission in 0.3 second
- Up to 35 hours of operation from backup battery
- . Communication with the hub at a distance of up to 1,800 m



SENSORS



Wireless opening detectors

- Protection against reed switch chattering
- Additional connector for third-party detector
- Up to 7 years of operation from battery
- Communication with the hub at a distance of up to 1,200 m



DoorProtect Plus Wireless opening, tilt and shock detector

- · Protection against reed switch chattering
- Built-in accelerometer
- Tilt detection from 5°
- Additional connector for third-party detector
- Up to 5 years of operation from battery
- Communication with the hub at a distance of up to 1,200 m



GlassProtect Wireless glass break detector

- 9 m glass break detection range
- 180° glass break detection angle
- DualTone digital algorithm for glass break verification, Adjustable sensitivity
- · Terminals to connect a third-party detector
- Up to 7 years of operation from battery
- Communication with the hub at a distance of up to 1.000 m

MOTION SENSORS



CombiProtect Wireless combined motion and glass break

- 12 m motion detection range
- 9 m glass break detection range
- 180° glass break detection angle
- DualTone digital algorithm for glass break verification, Adjustable sensitivity
- Up to 5 years of operation from battery
- · Communication with the hub at a distance of up to 1,200 m



MotionCam (PhOD) Wireless motion detector with photo camera

- Photo by alarm
- Photo on demand, photo by scenario
- Photo delivery in 9 seconds
- IR backlight for photos in the dark
- Filtering false alarms caused by motion
- Temperature compensation, pet immunity
- Up to 4 years of battery life Up to 1,700 m of two-way radio communication



MotionCam Wireless motion detector with photo camera

- · Photo by alarm
- Photo delivery in 9 seconds
- IR backlight for photos in the dark
- Filtering false alarms caused by motion
- Temperature compensation
- Pet immunity, Up to 4 years of battery life
- Up to 1,700 m of two-way radio communication



MotionProtect Wireless motion detector

- Filtering false alarms caused by motion
- Temperature compensation
- Pet immunity
- Up to 5 years of battery life
- Up to 1,700 m of two-way radio communication



MotionProtect Plus Wireless motion detector with additional microwave senso

- Filtering false alarms caused by motion
- Filtering thermal interferences caused by a heater, fireplace, air conditioner
- Temperature compensation, Pet immunity
- Up to 5 years of battery life
- Up to 1,200 m of two-way radio communication



Wireless motion detector with a narrow viewing angle

- · Detection zone up to 15 m
- 6° horizontal viewing angle
- · False alarm prevention system
- · Temperature compensation
- Up to 3 years of battery life • Up to 1,700 m of two-way radio communication









DualCurtain Outdoo Wireless outdoor curtain motion detector to guard property perimeter

- Up to 30 m of bidirectional detection range
- 4.5° horizontal viewing angle
- · Configuring the left and right sides separately
- Three-stage digital algorithm to prevent false
- · Near Area Detection, Pet immunity
- Anti-masking system, Weatherproof design
- Up to 4 years of battery life
- Up to 1,700 m of two-way radio communication



MotionCam Outdoor (PhOD) Wireless outdoor motion detector with photo

- Photo by alarm
- Photo on demand, Photo by scenario
- Three-stage digital algorithm to prevent false alarms, HDR photo camera
- Anti-masking system, Pet immunity
- Up to 3 years of operation from battery
- Dust and splash resistant
- Up to 1,700 m of two-way radio communication



MotionCam Outdoor Wireless outdoor motion detector with photo verification

- Photo by alarm
- Three-stage digital algorithm to prevent false alarms
- HDR photo camera
- Anti-masking system
- Pet immunity
- · Up to 3 years of operation from battery
- Dust and splash resistant
- Up to 1,700 m of two-way radio communication



MotionProtect Outdoor Wireless outdoor motion detector

- · Anti-masking system
- Two-stage digital algorithm to prevent false alarms
- · Pet immunity
- Up to 1,700 m of two-way radio communication
- Up to 5 years of operation from battery
- · External powering option



HomeSiren Compact wireless indoor siren

- Adjustable volume from 81 to 105 dB
- Alarm duration from 3 s to 3 min
- Terminal for a third-party LED
- Security mode indication Up to 5 years of operation from battery
- Communication with the hub at a distance of
- up to 2,000 m



StreetSiren Wireless outdoor siren

- Adjustable volume from 81 to 113 dB
- Alarm duration from 3 s to 3 min
- · LED frame to indicate alarms and security modes
- IP54 protection class
- Up to 5 years of operation from battery
- Connector for external 12 V= power supply
- · Communication with the hub at a distance of up to 1,500 m



KeyPad Wireless touch keyboard to manage security

- Blocks attempts to guess the passcode
- Duress code
- Security mode indication
- Up to 2 years of operation from battery
- Communication with the hub at a distance of up to 1,700 m



Wireless touch keypad supporting encrypted contactless cards and key fobs

- DESFire® technology support
- Blocks attempts to guess the passcode
- Duress code support
- Security mode indication
- Up to 4.5 years of operation from battery
- Up to 1,700 m of two-way radio communication



Encrypted contactless key fob

- DESFire® technology support
- Guest access
- · Up to 13 hubs in memory
- Data encryption
- · Copy protection





PANIC BUTTONS



Ajax SpaceControl Keyfob to manage security system

- Panic button
- Protection against accidental presses
- Command execution confirmation
- Up to 5 years of operation from battery
- Communication with the hub at a distance of up to 1,300 m



Button

- Panic and control modes
- Selectable alarm type
- Command execution confirmation
- Protection against accidental presses
- Protection from dust and splashes
- Up to 5 years of operation from battery
- Communication with the hub at a distance of up to 1,300 m



DoubleButton Wireless hold-up device

- PD 6662:2017 compliance
- Absolute protection against accidental presses
- · Protection from dust and splashes
- · Command execution confirmation
- · Up to 5 years of operation from battery
- · Communication with the hub at a distance of up to 1,300 m

LEAK/FIRE SENSORS



LeaksProtect Wireless water leak detector

- · Tool-free installation
- · Notifies about water drying
- IP56 enclosure protection
- Up to 5 years of battery life
- Connection with a hub at a distance of up to 1,300 m



FireProtect Wireless fire detector

- · Photoelectric sensor for smoke detection
- Temperature sensor for fire detection
- Built-in siren for 85 dB alerts
- · Can work without the hub
- . Up to 4 years of operation from battery
- Communication with a hub at a distance of up to 1,300 m



FireProtect Plus Wireless fire detector with carbon monoxide

- Photoelectric sensor for smoke detection
- Temperature sensor for fire detection
- CO sensor detecting 0,005% concentration of carbon monoxide
- Built-in siren for 85 dB alerts
- · Can work without the hub
- Up to 4 years of operation from battery
- · Communication with a hub at a distance of up to 1,300 m

INTERCOM

LANDLINE PHONES



- · Ringer volume control
- Tone pulse Switchable
- Redial
- Flash
- Pause
- LED for Ring indication
- Wall/ Desk Mountable



B25

- Ringer volume control switch
- Tone/Pulse Switchable Redial
- Flash
- Pause
- · Wall/ Desk Mountable



M71 WHITE

- 16 digit LCD display
- 99 incoming and 18 outgoing calls memory
- 6 one touch memory
- Do not disturb function (ring off)
- · Pre dial and edit function
- 5 set of alarm clock
- Pause and mute function

CORDLESS PHONES



X70

- 2.4GHz Digital Technology Cordless
- Dual Mode DTMF / FSK Caller ID System Compatible
- 1-Line, 14-Segment Alphanumeric LCD Display
- Blue Backlit LCD Display
- Illuminated Keypad • 20 Incoming Calls Memory



X90

- Caller ID Identification (CLI)
- Phone Book Memory 50 Nos Incoming Calls Memory - 40 Nos
- Monophonic & Polyphonic Ring Tones 05 Nos Each
- Handset Ringer Volume Control
- Auto Answer ON / OFF



F3-4G

- . LCD Display with Green Backlight
- Supports Quad Band GSM -850MHz/900MHz/1800MHz/1900MHz -3G HSPA/UMTS -B1/B2/B5/B8 Band -4G FDD-LTE -B1/B3/B5/B7/B8 Band -4G TDD-LTE -B38/B40/B41 Band
- Supports VoLTE (HD Voice Calling Service on
- Supports Wi-Fi Function (Hotspot Capability- 8





tp-link **WI-FI & NETWORKING**



WI-FI/ ACCESS POINT



EAP670 AX5400 Multi-Gigabit Ceiling Mount WiFi 6 Access Point

- Blazing-Fast WiFi 6 Speeds: Simultaneous 574 Mbps on 2.4 GHz and 4804 Mbps on 5 GHz totals 5378 Mbps WiFi speeds.†
- · High-Efficiency WiFi 6: More connected devices can enjoy faster speeds.
- Centralised Cloud Management: Omada SDN integration manages the whole network locally or from the cloud via web UI or Omada app.
- . 160 MHz Channel: Double the data at peak transmission times on a single stream with
- Seamless Roaming: Video streams and voice calls are unaffected as users move between locations
- Omada Mesh, PoE+ Powered



EAP653 AX3000 Ceiling Mount WiFi 6 Access Point

- Ultra-Fast WiFi 6 Speeds: Simultaneous 574 Mbps on 2.4 GHz and 2402 Mbps on 5 GHz totals 2976 Mbps WiFi speeds.
- High-Efficiency WiFi 6: More connected devices can enjoy faster speeds.
- Centralised Cloud Management: Omada SDN integration manages the whole network locally or from the cloud via web UI or Omada app.
- 160 MHz Channel: Double the data at peak transmission times on a single stream with
- Seamless Roaming: Video streams and voice calls are unaffected as users move between
- Omada Mesh, PoE+ Powered, Ultra-Slim Design



EAP265 HD AC1750 Wireless MU-MIMO Gigabit Ceiling Mount Access Poin

- Fast Dual-Band Wi-Fi: Simultaneous 450 Mbps on 2.4 GHz and 1300 Mbps on 5 GHz totals 1750 Mbps Wi-Fi speeds.
- High-Density Connectivity: MU-MIMO, Load Balance, and professional antennas improve capacity in high-density environments to connect more devices simultaneously.
- Integrated into Omada SDN: Supports Centralized Cloud Management, and Intelligent Monitoring.
- Centralized Management: Cloud access and Omada app for ultra convenience and easy management.
- Seamless Roaming
- · PoE Support, Secure Guest Network.



AC1350 Wireless MU-MIMO Gigabit **Ceiling Mount Access Point**

- · Fast Dual-Band Wi-Fi: Simultaneous 450 Mbps on 2.4 GHz and 867 Mbps on 5 GHz totals 1317 Mbps Wi-Fi speeds.
- Integrated into Omada SDN: Zero-Touch Provisioning (ZTP), Centralised Cloud Management, and Intelligent Monitoring.
- Centralised Management: Cloud access and Omada app for ultra convenience and easy management.
- Seamless Roaming: Even video streams and voice calls are unaffected as users move between locations
- PoE Support, Secure Guest Network, Advanced Wireless Tech.



EAP615-Wall AX1800 Wall Plate WiFi 6 Access Point

- Superior WiFi 6 Speeds: Simultaneous 574 Mbps on 2.4 GHz and 1201 Mbps on 5 GHz totals 1775 Mbps Wi-Fi speeds.**
- High-Performance Connectivity: Guarantee higher network efficiency and lower latency.
- Four Gigabit Ports: 4 Gigabit Ethernet ports (1× uplink + 3× downlink), with one downlink port supporting PoE pass-through to provide power for wired device.
- Centralized Management: Integrates into Omada SDN for cloud access and remote management.
- Secure Guest Network, Easy Installation and PoE Support



- Durable, weatherproof enclosure for outdoor Wi-Fi applications
- Up to 1200Mbps1 with 2×2 MIMO technology Omada Mesh Technology enables wireless
- connectivity between APs for extended range, making wireless deployments more flexible and
- Supports Seamless Roaming
- High transmission power and high gain antennas provide a long-range coverage area
- Cloud centralized management and Omada app for ultra convenience and easy management
- 802.3af/Passive PoE (PoE Adapter Included) compatible and simple mounting design





Whole Home Mesh Wifi DECO SERIES



Deco X50-PoE AX3000 Whole Home Mesh WiFi 6 System with PoE

- AX3000 Dual-Band WiFi 2402 Mbps (5 GHz) + 574 Mbps (2.4 GHz).
- Multiple Installation Options Place it on a tabletop or install it on a ceiling or wall with the adaptive accessories
- PoE Supported Power over Ethernet for simplified network deployment.
- Multi-Gig 2.5 Gbps Wired Network 1× 2.5 Gbps port + 1× Gigabit Port.
- Seamless Al-Driven Mesh It intelligently learns your network environment to provide the ideal WiFi unique to your home.
- TP-Link HomeShield
- **Universal Compatibility**
- Setup Made Easier Than Ever



Deco X50-Outdoor AX3000 Outdoor/Indoor Whole Home Mesh WiFi 6

- Ultra-Fast WiFi 6 Speeds: Simultaneous 574 Mbps on 2.4 GHz and 2402 Mbps on 5 GHz totals 2976 Mbps WiFi speeds.
- High-Efficiency WiFi 6: More connected devices can enjoy faster speeds.
- Centralised Cloud Management: Omada SDN integration manages the whole network locally or from the cloud via web UI or Omada app.
- 160 MHz Channel: Double the data at peak transmission times on a single stream with HE160.
- Seamless Roaming: Video streams and voice calls are unaffected as users move between locations.
- Omada Mesh, PoE+ Powered, Ultra-Slim Design



Deco M5 AC1300 Whole Home Mesh Wi-Fi System

- Deco uses a system of units to achieve seamless. whole-home Wi-Fi coverage - eliminate weak signal areas once and for all!
- With advanced Deco Mesh Technology, units work together to form one unified whole-home network with the same network name. Devices automatically switch between Decos as you move through your home for the fastest possible speeds
- A Deco M5 delivers Wi-Fi to an area of up to 2,000 square feet. And if that's not enough, simply add more Decos to the network anytime to increase coverage.
- Deco M5 provides fast and stable connections with speeds of up to 1267Mbps and works with any internet service provider (ISP) and modem.
- Deco can handle traffic from even the busiest of networks, providing lag-free connections for over 100



Deco X20 AX1800 Whole Home Mesh Wi-Fi 6 System

- Faster Connections: Wi-Fi 6 speeds up to 1.800 Mbps-1,201 Mbps on 5 GHz and 574 Mbps on 2 4 GHz
- Connect More Devices: OFDMA and MU-MIMO technology quadruple capacity to enable simultaneous transmission to more devices.
- Boosted Seamless Coverage: Achieve seamless whole home coverage with a clearer and stronger whole home Wi-Fi signal generated by Wi-Fi 6.
- Ultra-Low Latency: Greater reduction in latency enables more responsive gaming and video chatting.
- One Unified Network: Multiple units form a whole-home network that auto-selects the best connection as you move around your home.



Deco X60 V3 AX3000 Whole Home Mesh Wi-Fi 6 Unit

- Faster Connections: Wi-Fi 6 speeds up to 3.000 Mbps-2,402 Mbps on 5 GHz and 574 Mbps on 2.4
- Connect More Devices: OFDMA and MU-MIMO technology quadruple capacity to enable simultaneous transmission to more devices.
- Boosted Seamless Coverage: Achieve seamless whole-home coverage with a clearer and stronger whole-home Wi-Fi signal generated by Wi-Fi 6.
- Ultra-Low Latency: Greater reduction in latency enables more responsive gaming and video chatting
- One Unified Network: Multiple units form a wholehome network that auto-selects the best connection as you move around your home.
- Total Security, TP-Link HomeShield, Setup Made Easier Than Ever



Deco XE200 V1 AXE11000 Whole Home Mesh Wi-Fi 6E System

- AXE11000 Tri-Band WiFi 4804 Mbps (6 GHz) + 4804 Mbps (5 GHz) + 1148 Mbps (2.4 GHz).
- Works on the 6 GHz Band Minimizes congestion with greenfield spectrum, delivering robust high-speed connections.
- 16-Stream WiFi Simultaneous data transmissions with 16 streams.
- Multi-Gig 10 Gbps Wired Network 1× 10 Gbps port + 2× Gigabit ports.
- Boosted Seamless Coverage Mesh WiFi coverage up to 6,500 ft2 (2-pack) and 3,300 ft2 (1-pack).
- Seamless Al-Driven Mesh Intelligently learns your network environment to provide the ideal WiFi unique to your home.
- TP-Link HomeShield, Universal Compatibility
- · Setup Made Easier Than Ever







DESKTOP SWITCHES



TL-SG1005D 5-Port Gigabit Desktop Switch

- 5 Gigabit Auto-Negotiation RJ45 ports, supports Auto MDI / MDIX.
- Green Ethernet technology saves power consumption.
- IEEE 802.3x flow control provides reliable data transfer.
- · Plastic case, desktop or wall-mounting desian.
- · Plug and play, no configuration required.



TL-SG1008D 8-Port Gigabit Desktop Switch

- 8 Gigabit Auto-Negotiation RJ45 ports, supports Auto MDI / MDIX
- Green Ethernet technology saves power
- IEEE 802.3x flow control provides reliable data
- Plastic case, desktop or wall-mounting design
- Plug and play, no configuration required



TI -SG116 16-Port Gigabit Desktop Switch

- 16 10/100/1000Mbps Auto-Negotiation RJ45 ports supporting Auto-MDI/MDIX
- Green Ethernet technology saves power consumption
- IEEE 802.3x flow control provides reliable data transfer
- · Steel housing, desktop or wall-mounting design
- · Supports 802.1p/DSCP QoS and IGMP Snooping function
- · Plug and play, with no configuration needed

MANAGED SWITCHES



TL-SG3428 JetStream 24-Port Gigabit L2 Managed Switch with 4 SFP Slots

- Full Gigabit Ports: 24× gigabit RJ45 ports and 4× gigabit SFP slots provide high-speed connections.
- Integrated into Omada SDN: Centralized Cloud Management and Intelligent Monitoring.
- Centralized Management: Cloud access and Omada app for ultra convenience and easy management.
- Static Routing: Helps route internal traffic for more efficient use of network resources.
- Robust Security Strategies: IP-MAC-Port Binding, ACL, Port Security, DoS Defend, Storm control, DHCP Snooping, 802.1X, Radius Authentication, and more
- Optimise Voice and Video Applications: L2/L3/L4 QoS and IGMP snooping.
- Standalone Management: Web. CLI (Console Port. Telnet, SSH), SNMP, RMON, and Dual Image bring powerful management capabilities.



JetStream 48-Port Gigabit L2 Managed Switch with 4 SFP Slots

- Full Gigabit Ports: 48× gigabit RJ45 ports and 4× gigabit SFP Slots provide high-speed connections.
- Integrated into Omada SDN: Zero-Touch Provisioning (ZTP)*, Centralized Cloud Management, and Intelligent Monitoring
- Centralized Management: Cloud access and Omada app for ultra convenience and easy management.
- Static Routing: Helps route internal traffic for more efficient use of network resources.
- Robust Security Strategies: IP-MAC-Port Binding, ACL, Port Security, DoS Defend, Storm control, DHCP Snooping, 802.1X, Radius Authentication, and more
- Optimize Voice and Video Applications: L2/L3/L4 QoS and IGMP snooping.
- Standalone Management: Web, CLI (Console Port, Telnet, SSH), SNMP, RMON, and Dual Image bring powerful management capabilities



OC200 **Omada Hardware Controller**

- Centralized Management: Up to 100 Omada access points, 20 JetStream switches, and 10 Omada routers.
- Free Cloud Access: Manage and monitor with the Omada app or Web UI from anywhere, anytime.
- On-Premises Management: Locally monitor and manage devices with the ultimate security and stability
- Industry-Leading Hardware Design: A powerful chipset, durable metal casing, USB 2.0 port for auto backup, and two Fast Ethernet ports.
- Flexible Power Supply: 802.3af/at PoE or Micro USB (DC 5V/Minimum 1A) for flexible installation.
- Easy and Intelligent Network Monitoring: The easy-touse dashboard makes it simple to see the real-time network status and traffic distribution.
- Real-Time Network Topology: Helps IT admins quickly see and troubleshoot connections at a glance.
- Easier Network Maintenance: WiFi heatmap simulator, visualizable network report, and batch & multi-site management benefit network maintenance.





AHUJA **PA SYSTEM**



PA CEILING SPEAKER



CS-663T 6W/100V PA Ceiling Speaker

- 15.24 cm (6") Full Range Speaker, 6W/100V.
- Easy selection of power taps through change of receptacle on 100V LMT.
- Aesthetically designed plastic grille and easy mounting with spring loaded clamps.
- Ideal for Hotels... Shopping Malls... Offices...

CS-5061T 6W/100V PA Ceiling Speaker

- 12.7 cm (5") Full Range Speaker, 6W/100V.
- Beautiful powder coated aluminium mesh grille and moulded plastic frame.
- 100V line operation with easy power tap selection through a terminal block.
- Superbly engineered for simple and safe
- Ideal for Offices... Restaurants... Hospitals... Shopping Malls... Hotel... Gymnasiums

CSX-5081T 8W RMS PA Ceiling Speaker

- 12.7 cm (5") Full Range Speaker with power taps of 8/4/2W.
- 8 Watts continuous power handling capacity
- Easy mounting with spring loaded wing clamps.
- 100V operation with easy selection of power taps through a terminal block.
- Elegant, low profile rimless ceiling speaker with clear, highly intelligible sound. Low profile appearance ideally suited for high-end offices, restaurants, bars, malls etc.

PA Wall SPEAKER

PS-300TM 10 WATTS 2-Way Compact PA Wall Speaker

- High fidelity 2-Way, 100V multi-purpose PA wall speaker.
- . 100V, Power taps of 6W, 3W & 1.5W
- Facility to use as 8 ohms Low Impedance Speaker available.
- Power taps can be selected
- through the rotary switch.
- Movable mounting bracket supplied, can be mounted in vertical or horizontal positions.

PS-400TM 16 WATTS 2-Way Compact PA Wall Speaker

- High fidelity 2-Way, 100V multi-purpose PA wall speaker.
- . 100V; Power taps of 16W, 8W & 4W.
- Facility to use as 8 ohms Low Impedance Speaker available.
- Power taps can be selected through a rotary switch.
- Movable mounting bracket supplied, can be mounted in vertical or horizontal positions.

PS-300T 10 WATTS 2-Way Compact PA Wall Speaker

- Speaker System consists of woofer & dome tweeter.
- Elegant plastic cabinet in white colour.

ALUHA

- High fidelity 2-Way, 100V multi purpose PA speaker system.
- 100V, Power taps of 6W, 3W & 1.5W
- · Power taps can be selected through rotary switch.
- Facility to use as 8 ohms Low Impedance Speaker available.
- Key hole for easy wall mounting.
- Threaded brass ferrule for stand mounting.
- Ideal for background music in offices, banks, restaurants, showrooms etc.



AHUJA **PA SYSTEM**

AMPLIFIERS



SSA-160®DP 160 WATTS WITH BUILT-IN DIGITAL PLAYER

- 5 Mic & 2 Aux Inputs.
- · Built-in MP3 player with remote control for USB, SD/MMC card reader
- · Preamplifier and Line Output for connecting to a Booster Amplifier and for recording the programme.
- · Line Input for connecting the output from any external mixer or permitting SSA-160DP to be used as a Booster Power Amplifier.
- Resettable circuit breaker for protection against overload and short circuit.
- · Instant transfer to DC power (Car Battery) if AC power fails.
- Box Speaker/Driver Unit selector switch. Bass boost defeated at Driver Unit position for safer operation of driver units.
- 5 LED array for output level monitoring

SSW-16M

16 Channel Zone Selector

Compact and reliable manual zone selector with

When multiple units of SSW-16M are used, ALL

CALL activation is possible from any one SSW-

16M, by using LOOP THROUGH facility. Built in relay for ALL CALL.

LED indication of selected zones

1 x 100V Input, 16 x 100V Outputs, Manually

provision for switching a 100V audio signal to one

PAGING ACCESSORIES

or more of upto 16 zones.

Switchable.



SSB-120®DP 120 WATTS WITH BUILT-IN DIGITAL PLAYER

- 5 Mic & 2 Aux Inputs.
- Built-in MP3 player with remote control for USB, SD/MMC card reader.
- Line output for connecting to a Booster Amplifier and Preamplifier Output for recording the programme.
- Cut and Boost type Bass & Treble controls.
- Instant transfer to DC power (Car Battery) if AC power fails.
- 5 LED array for output level monitoring.



DPA-570®M 50 WATTS WITH BUILT-IN DIGITAL PLAYER

- 3 Mic & 1 Aux Input.
- Built-in MP3 player with USB reader and remote control.
- Bluetooth facility
- · Line Output for connecting to a Booster Amplifier.
- Cut and Boost type Bass & Treble controls.
- Instant transfer to DC Power (Car Battery) if AC power fails.



APM-201RM Remote Paging Microphone

- A high performance 12 zone paging console housed in an elegant aluminium housing. It works with APM-202CU to make a 6 or 12 zone zonal paging system.
- 12 Zone Paging Console with a 16"(40 cm) gooseneck.
- 12 Zone Selector Switches, plus ALL CALL switch
- Separate Mic ON/OFF switch.
- LED indication of zone selection.
- RESET switch to reset all zone selections.
- Group selection facility.
- Built in chime circuit.
- Chime & Mic level controls.
- Secure 8 pin lockable connectors.
- Can be used with one APM-202CU to make a 6 zone paging system, or with two nos APM-202CU to make a 12 zone paging system.
- Operates on 24V DC supply from APM-202CU.



ASM-980XLR **Unidirectional Dynamic Vocal & Speech**

- · Rugged & reliable microphone with superb speech quality and excellent finish.
- Chiselled mic body to obtain anti-roll design. Ideal for live vocals and all type of PA applications.
- Supplied with quick detachable holder with 3-pin professional XLR connector & 10 mtrs. twin core shielded low noise cable.













T15 100 Watt Bookshelf Speaker with Dolby



T30 CENTER CHANNEL SPEAKER



150 Watt Home Theater Floor Standing Tower Speaker (Pair)



PSW10 POWERED 10" 100W SUBWOOFER



AVR-X1700H 7.2 Ch. 80W 8K AV Receiver with HEOS® Built-in







Klipsch Black Reference Theater Pack 5.1 **Surround Sound System**

SHOP NOW







OUR CONTACT

- +91-9672452691
- info@prajasecurity.com
- www.prajasecurity.com
- 133-C, Pitamabar Nagar, Gajsinghpura, Jaipur,302021





